



KLIXON® | Small Frame PD Series (PDM, PDA)

2 to 40 Amp Precision Thermal Circuit Breaker

FEATURES


- 30VDC or 120VAC, 2 to 40 Amps
- Sealed assemblies, available in manual and automatic reset options
- Ignition protected
- UL Recognized E36869

DESCRIPTION

The KLIXON® PD series thermal breakers are designed to protect wiring and meet the harshest environmental requirements. The PD series are weatherproof sealed for protection against moisture, dust, grease, fuel vapors and other harsh environments. The PD series breakers are compact, lightweight and designed to interrupt short circuits or overloads, and combine trip-free protection with fast response time. Typical applications are protection of wire and cable of accessory circuits, equipment and battery protection in construction and off-road equipment, marine, recreational vehicles (RV's), mining, agricultural equipment and electric (hybrid) vehicles.


The PD series is used in commercial and military applications.

ORDERING INFORMATION

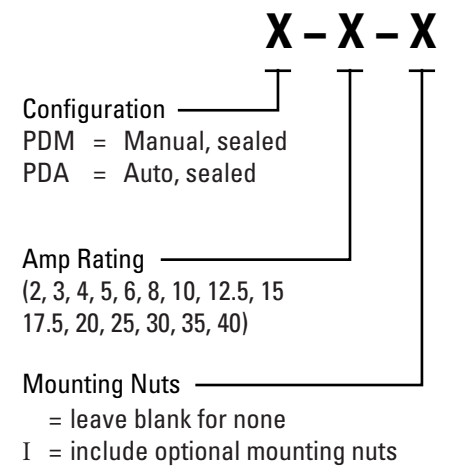


PERFORMANCE CHARACTERISTICS




| | |
|--|---|
| Calibration : 200% rated current, 77°F (25°C) | 2 to 10 amps : 20 to 150 seconds 12.5 to 40 amps : 8 to 50 seconds |
| Ultimate Trip at 77°F (25°C) | Must hold 110%, must trip 138% |
| Endurance | Per SAE J553 |
| Interrupt Current Capacity | Per SAE J553 and ABYC E-11 |
| Vibration | 10G MIL-STD-202 Method 204, Condition A |
| Mechanical Shock | MIL-STD-202 Method 213, Condition C, 100G |
| Salt Spray | MIL-STD-202 Method 101D |
| Dielectric Strength | MIL-STD-202 Method 301, 1500VAC min |
| Insulation Resistance | MIL-STD-202 Method 302, Condition B, 100 MΩ min |
| Weight (with mounting nuts) | PDM : 48 grams max PDA : 41 grams max |

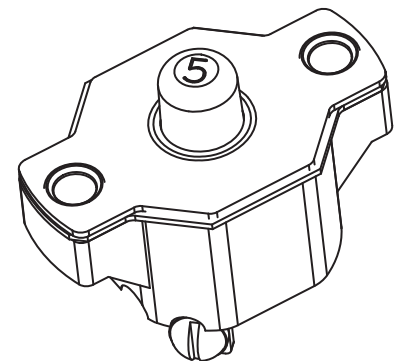


TRIP CURVE - Approximate Time, Current Characteristics At 77°F (25°C)

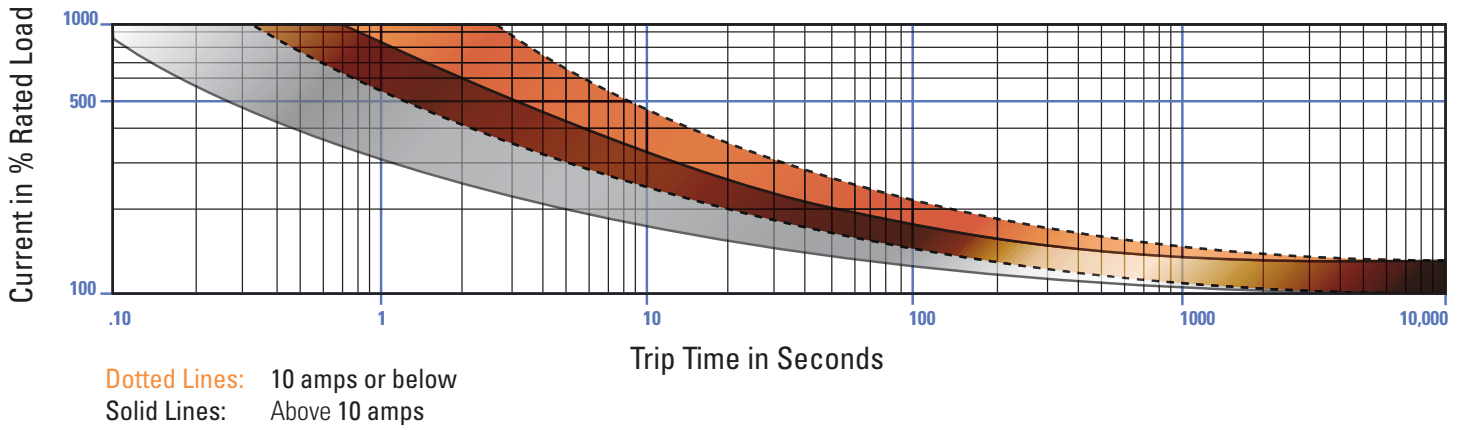

DIMENSIONS - PDM

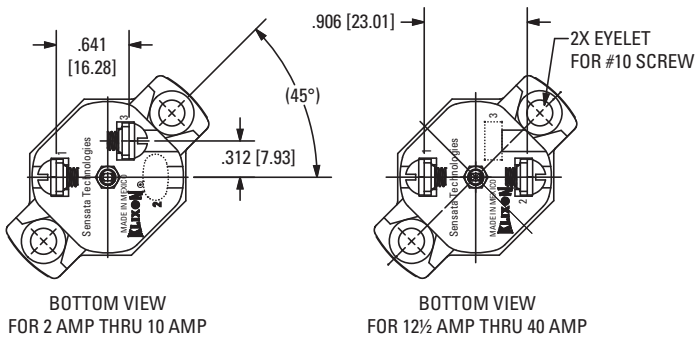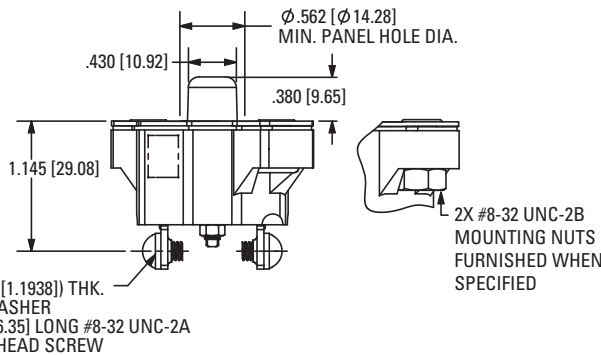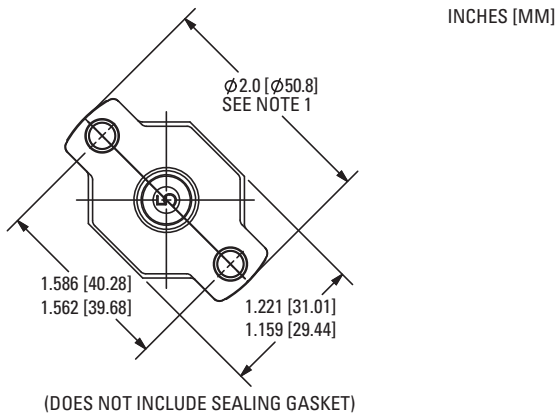

DERATING CURVE

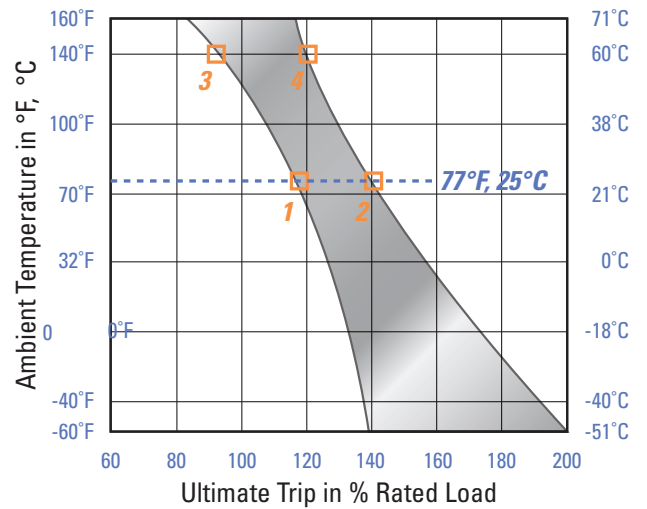

Performance characteristics are based on room temperature (77°F, 25°C). Consult Derating curve for ambient temperatures significantly higher or lower than standard room temperature.

Example: At 77°F (25°C) the device is calibrated to hold at 110% of rated current (1) and trip at 138% of rated current (2). At 140°F (60°C), the same device will hold at approximately 92% of rated current (3), and trip at approximately 120% of rated current (4).



The World Depends on Sensors and Controls

Sensata Technologies Inc.

529 Pleasant Street
 Attleboro, MA 02703, USA
 Phone: +1 508-236-3287

<http://www.sensata.com/>

Important Notice: Sensata Technologies (Sensata) reserves the right to make changes to or discontinue any product or service identified in this publication without notice. Sensata advises its customers to obtain the latest version of the relevant information to verify, before placing any orders, that the information being relied upon is current. Sensata assumes no responsibility for infringement of patents or rights of others based on Sensata applications assistance or product specifications since Sensata does not possess full access concerning the use or application of customers' products. Sensata also assumes no responsibility for customers' product designs.